



DJI Matrice 350 RTK


Worry-Free Basic Combo



+91 91287 66095




Flyworldgadget.in



The DJI Matrice 350 RTK (M350 RTK) is an upgraded flagship enterprise drone platform, setting a new benchmark for the industry. Built for precision, resilience, and versatility, it injects innovative strength into complex aerial operations for surveying, inspection, public safety, and more.



Short Intro:



In the Box



Aircraft x1



DJI RC Plus x1



WB37 Battery x1



TB65 Flight Battery x1



Carrying Case x1



BS65 Intelligent Battery Station x1




Landing Gear x2



Propellers (Pair) x1




Screws and Tools x1



In the Box




Cleaning Tools x1

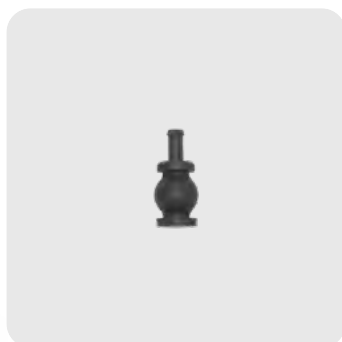

Spare Gimbal Damper x4



Rubber Port Cover (Set) x1



Key Features


Feature	Description
Performance	55-Minute Max Flight Time
Durability	IP55 Rating & Wide Temp Range
Transmission	DJI O3 Enterprise Transmission
Safety	6-Directional Sensing & Positioning
Safety	Arm Lock Indicator
Control	DJI RC Plus
Payload	2.7 kg Max Payload & Multi-Gimbal Support
Battery System	New TB65 Dual-Battery System
Precision	Advanced RTK Positioning
Imaging	Night-Vision FPV Camera

Technical Spec

Category	Specification
Aircraft	
Dimensions (Unfolded, without propellers)	810×670×430 mm (LWH)
Dimensions (Folded, with propellers)	430×420×430 mm (LWH)
Diagonal Wheelbase	895 mm
Weight (with two TB65 batteries)	≈6.47 kg
Max Takeoff Weight	9.2 kg
Max Payload	2.7 kg
Max Flight Time	55 minutes (No Payload, Windless)
Max Wind Resistance	12 m/s
Max Flight Altitude (Above Sea Level)	5000 m (Standard Propellers); 7000 m (High-Altitude Propellers)
Ingress Protection Rating	IP55
Operating Temperature	-20°C to 50 ° C
Hovering Accuracy (RTK enabled and fixed)	Vertical: ±0.1 m; Horizontal: ±0.1 m
RTK Positioning Accuracy (RTK FIX)	Horizontal: 1 cm+1 ppm; Vertical: 1.5 cm+1 ppm
Supported GNSS	GPS + GLONASS + BeiDou + Galileo
Supported DJI Gimbals	Zenmuse H20/H20T/H20N/P1/L1

Technical Spec

Category	Specification
Video Transmission	
System	DJI O3 Enterprise Transmission
Max Transmission Distance (Unobstructed, Free of Interference)	20 km (FCC); 8 km (CE/SRRC/MIC)
Intelligent Flight Battery (TB65)	
Capacity	5880 mAh
Energy	263.2 Wh
Charging Time (220V power supply)	≈60 mins (Fully charge two batteries)
Cycle Count	Up to 400 cycles

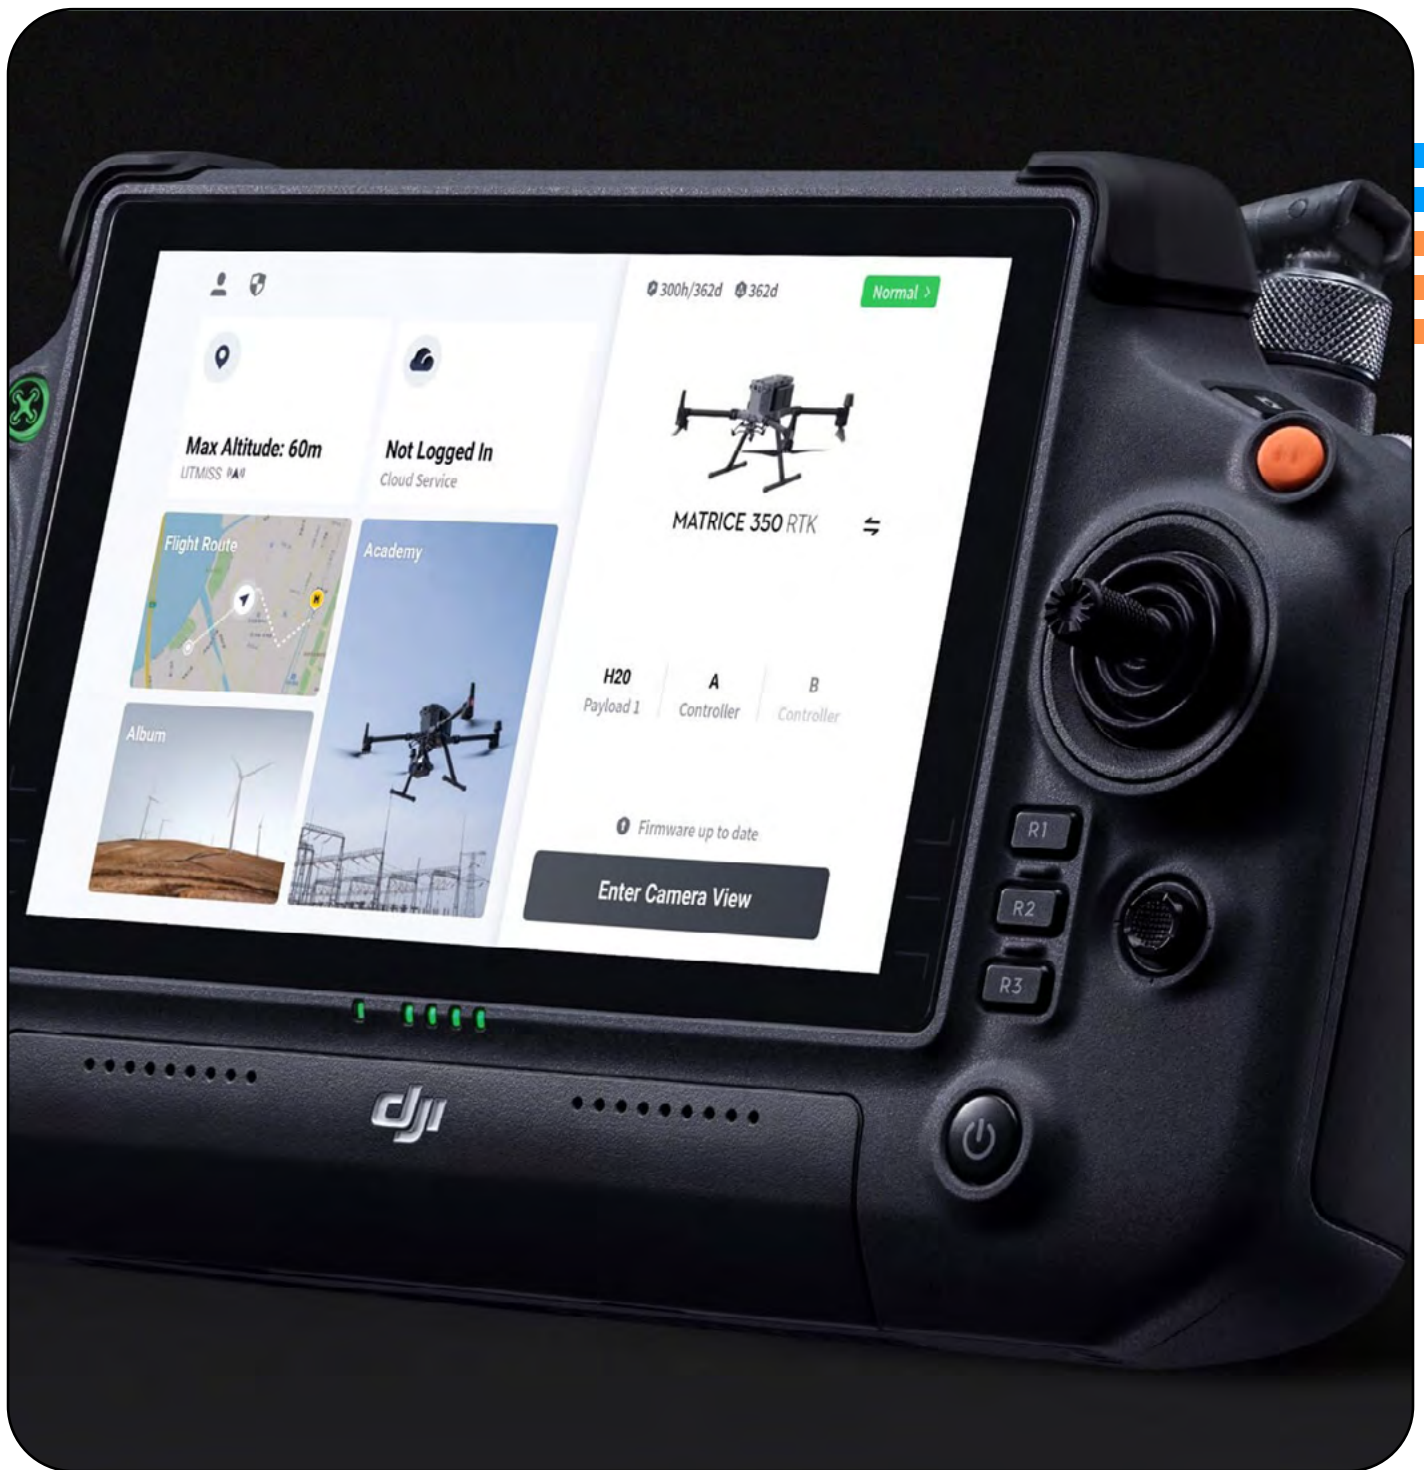

Contact Us

2nd floor, Main 100 Futa Road, Main
Market road, Sant Nagar, Delhi, 110084

Gmail: info@flyworldgadget.in

 +91 91287 66095

 Flyworldgadget.in

